

MAKE THE
WORLD SEE

Milestone Systems

XProtect® Mobile client 2022 R2

User manual



Contents

Copyright, trademarks, and disclaimer	4
Supported VMS products and versions	5
Overview	6
What's new?	6
In XProtect Mobile client 2022 R2	6
Server and client components of XProtect Mobile (explained)	6
XProtect Access and XProtect Mobile (explained)	7
Requirements and considerations	10
Before you start (administrators)	10
Requirements for listening to audio	10
Requirements for using push-to-talk	11
Requirements for using video push	12
Requirements for direct streaming	12
Installation	13
Installing XProtect Mobile Server components (administrators)	13
Install XProtect Mobile on a mobile device	15
Configuration	16
Configure user profiles on server (administrators)	16
Enable access request notifications in XProtect Mobile	16
Select a language for the app	17
Connect your mobile device to a mobile server	17
Connection settings for a mobile server (explained)	20
View and edit connections to mobile servers	21
Enable or disable notifications	22
Buttons and settings overview	24
Streaming video from your mobile device (explained)	31
Set up video streaming on your mobile device	32
Listening to incoming audio (explained)	33

- Push-to-talk (explained)34
- Direct streaming (explained) 35
- Adaptive streaming (explained) 36
- Operation 37**
- Log in to the XProtect Mobile app 37
- Viewing live video 39
- Bookmarks (usage)41
 - Bookmarks (explained) 41
 - View the bookmark details or play the bookmark video clip42
 - Add or edit bookmarks 43
 - Delete bookmarks 45
- Use the filter 45
 - Filter your views45
 - Filter your bookmarks 46
- Interact with live video in full screen48
- Use picture-in-picture 50
- Take a snapshot 50
- Find and view video recordings 51
- Using the playback timeline (explained) 53
- View or create an investigation 54
- Stream video from your device to your surveillance system 56
- View alarms 57
- Using actions in XProtect Mobile 58
- View and trigger actions 58
- React to a notification 59
- View doors and take action 59
- Respond to access requests 60
- Investigate access control events 62

Copyright, trademarks, and disclaimer

Copyright © 2022 Milestone Systems A/S

Trademarks

XProtect is a registered trademark of Milestone Systems A/S.

Microsoft and Windows are registered trademarks of Microsoft Corporation. App Store is a service mark of Apple Inc. Android is a trademark of Google Inc.

All other trademarks mentioned in this document are trademarks of their respective owners.

Disclaimer

This text is intended for general information purposes only, and due care has been taken in its preparation.

Any risk arising from the use of this information rests with the recipient, and nothing herein should be construed as constituting any kind of warranty.

Milestone Systems A/S reserves the right to make adjustments without prior notification.

All names of people and organizations used in the examples in this text are fictitious. Any resemblance to any actual organization or person, living or dead, is purely coincidental and unintended.

This product may make use of third-party software for which specific terms and conditions may apply. When that is the case, you can find more information in the file `3rd_party_software_terms_and_conditions.txt` located in your Milestone system installation folder.

Supported VMS products and versions

This manual describes features supported by the following XProtect VMS products:

- XProtect Corporate
- XProtect Expert
- XProtect Professional+
- XProtect Express+
- XProtect Essential+

Milestone tests the features described in this manual with the above-mentioned XProtect VMS products in the current release version and the two previous release versions.

If new features are only supported by the current release version and not any previous release versions, you can find information about this in the feature descriptions.

You can find the documentation for XProtect clients and add-ons supported by the retired XProtect VMS products mentioned below on the Milestone download page (<https://www.milestonesys.com/downloads/>).

- XProtect Enterprise
- XProtect Professional
- XProtect Express
- XProtect Essential

Overview

What's new?

In XProtect Mobile client 2022 R2

Notifications:

- By default, notifications are disabled when you add a server. For more information, see [Enable or disable notifications on page 22](#).

In XProtect Mobile client 2022 R1

Bookmarks:

- You can edit the start time, the event time, or the end time of bookmarks.
- To find a specific bookmark, you can search and use filtering. There are three options for filtering bookmarks:
 - You can enter a keyword from the headline or description of the bookmark or enter the complete bookmark ID.
 - You can select specific cameras.
 - You can select a predefined time interval. You can also customize the time interval that you want to apply as a filter.

Video diagnostics overlay:

- You can enable this setting to view the FPS (frames per second), the codec, the resolution, and the type of streaming of the video stream in the selected view. The feature displays the information as an overlay to the video and can help you to troubleshoot XProtect Mobile client issues related to the video stream and performance issues.

Direct streaming:

- The feature is also available in XProtect Professional+ and XProtect Express+.

Adaptive streaming:

- The feature is also available in XProtect Professional+ and XProtect Express+.

Server and client components of XProtect Mobile (explained)

In the free XProtect Mobile app, you can:

- View live video and video recordings.
- Play incoming and outgoing audio in live video and video recordings.
 - Use the push-to-talk (PTT) feature while you are watching live video from one camera.
 - Play back incoming and outgoing audio in playback mode.
- Use video push to stream live video with audio from the camera on your mobile device to your XProtect surveillance system.
- Use bookmarks to quickly locate relevant video sequences in live videos and video recordings.
- Create investigations.
- Activate actions that trigger events in your video surveillance system.
- View videos for alarms that are triggered by various events.

XProtect Mobile has five components:

- XProtect Mobile client is a mobile surveillance app that you can install and use on your Android or iOS device. You can use as many installations of XProtect Mobile client as you need. For more information, see [Installing XProtect Mobile Server components \(administrators\) on page 13](#)
- XProtect Web Client lets you view live video in your web browser and lets you download recordings
- The XProtect Mobile server is responsible for giving the XProtect Mobile client and XProtect Web Client users access to the system
- XProtect Mobile plug-in
- Mobile Server Manager

In addition to acting as a system gateway for XProtect Mobile client and XProtect Web Client, the mobile server can transcode video as the original camera video stream, in many cases, is too large to fit the bandwidth available for the client users.

XProtect Mobile supports direct streaming and adaptive streaming in live mode.

For more information, see the [administrator manual for XProtect VMS](#).

XProtect Access and XProtect Mobile (explained)




The use of XProtect Access requires that you have purchased a base license that allows you to access this feature within your XProtect system. You also need an access control door license for each door you want to control.

With XProtect Access and the XProtect Mobile app installed on your smartphone or tablet, you get:

- Live monitoring of events at access points
- Operator aided passage for access requests
- Investigation of events at access points
- Centralized overview and control of door states
- Cardholder information

Access requests

When you get an access request on your device, it may look like this:

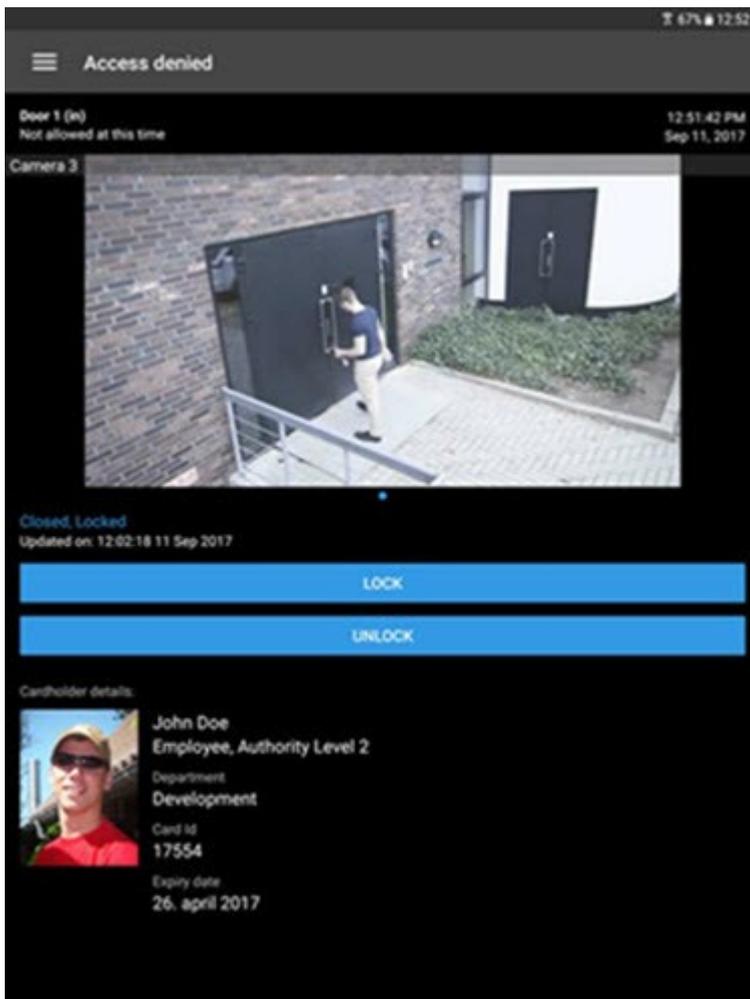


Access requests let you:

- View the state of the door, for example, **Closed, Locked**.
- View live video.
- View the cardholder details, for example, picture and authority level.

- Lock doors and grant access to cardholders by unlocking doors.
- Listen to incoming audio in live mode.
- Use the push-to-talk (PTT) feature while you are watching live video from one camera.

Access requests are listed under **Access requests** for two minutes. After that, they appear only in the **Events** list, where you can watch the video recorded when the cardholder tried to gain access.

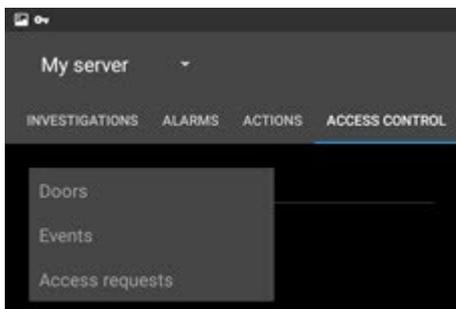

Requirements and considerations

Before you start (administrators)

To use the XProtect Mobile app for access control purposes, you need:

- A Milestone Care Plus service agreement
- Licenses required for using XProtect Access. This includes a base license and a door license for each door
- An access control system that is configured and integrated with your VMS
- If you are using one of the products listed below, you must configure the user profiles to enable access control and access requests:
 - XProtect Corporate
 - XProtect Expert
 - XProtect Professional+
 - XProtect Express+
 - XProtect Essential+

If you are using XProtect Essential+, also see [Configure user profiles on server \(administrators\) on page 16](#).

- You must download the XProtect Mobile app from App StoreSM or Google Play and install it on your smartphone or tablet.
- In the XProtect Mobile app:
 1. You must specify the server settings of the mobile server (see [Connect your mobile device to a mobile server on page 17](#)).
 2. In the server settings, you must enable access request notifications (see [Enable access request notifications in XProtect Mobile on page 16](#)).



If you have enabled the **Operator login required** option, the access control system will not be available in XProtect Mobile client. For more information, see the [administrator manual for XProtect VMS](#).

Requirements for listening to audio

To listen to incoming audio from the cameras in your XProtect VMS through a mobile device, you must have:

- A microphone attached to a camera.



When a camera in your surveillance system has a microphone attached, you can play audio without any additional settings needed. The audio icon on the camera toolbar shows whether the audio feature is available.

- Sufficient user permissions.



Access to the incoming audio feature may be restricted depending on your user permissions. Ask your system administrator if in doubt.

- HTTP or HTTPS with CA certificate connection.

If you want to use an HTTPS connection, a digital certificate from a certificate authority (CA) must be installed on your XProtect Mobile server.



CAs issue digital certificates that verify the identities of users and websites that exchange data on the internet. Examples of CAs are companies like Comodo, Symantec, and GoDaddy. For detailed information about certificates, see the topic about enabling encryption in the guide about certificates.

Requirements for using push-to-talk

To use the push-to-talk (PTT) feature on your mobile device in your XProtect VMS, you must have:

- Cameras that have speakers attached.
- Sufficient user permissions.



Access to the push-to-talk feature may be restricted depending on your user permissions. Ask your system administrator if in doubt.

- Allowed the XProtect Mobile app to use the microphone of your mobile device.
- HTTP or HTTPS with CA certificate connection.

If you want to use an HTTPS connection, a digital certificate from a certificate authority (CA) must be installed on your XProtect Mobile server.

Requirements for using video push

To use video push and to stream video with audio, you must allow the XProtect Mobile app to access the camera and microphone of your mobile device.

Requirements for direct streaming

XProtect Mobile supports direct streaming in live mode.

You can use direct streaming to monitor more than 100 concurrent live video streams at Full HD 30 FPS. To do this, you must:

- Use cameras that support the H.264 codec or the H.265 codec.
- Allow direct streaming on your mobile device (see [Buttons and settings overview on page 24](#)).

For more information, see the [administrator manual for XProtect VMS](#).

Installation

Installing XProtect Mobile Server components (administrators)

This information is primarily for system administrators. For detailed feature descriptions and procedures for configuration and maintenance, see the [administrator manual for XProtect VMS](#).

You can install the XProtect Mobile Server component when you install version 2013 and all later versions of XProtect products:

- XProtect Corporate
- XProtect Expert
- XProtect Professional+
- XProtect Express+
- XProtect Essential+
- Milestone Husky
- Milestone Arcus

To get the most out of XProtect Mobile, make sure that you're using the latest version of your VMS product. Information about the products is available on the Milestone website (<https://www.milestonesys.com/solutions/platform/product-index/>).

You can also download XProtect Mobile Server for free from the download page on the Milestone website (<https://www.milestonesys.com/downloads/>).

Where to install the XProtect Mobile Server component

Install the XProtect Mobile Server component on the computer that runs your surveillance system or on a dedicated computer.

If you plan to have more than ten cameras in your system showing video simultaneously, Milestone recommends that you install XProtect Mobile Server on a dedicated computer.

You can install the XProtect Mobile server in various ways:

XProtect product	Installation method	
	Installation on the same computer as the VMS	Installation on a dedicated computer
<ul style="list-style-type: none"> • XProtect Corporate • XProtect Expert • XProtect Professional+ • XProtect Express+ • XProtect Essential+ 	<p>Complete a Single Computer installation of the XProtect VMS software. This installation includes the XProtect Mobile Server.</p>	<p>Run the separate XProtect Mobile Server installer.</p>

Installing the XProtect Mobile plug-in component

You should install the XProtect Mobile plug-in on all computers that run the Management Client:

1. Run the XProtect Mobile installer.
2. Choose a **Custom** installation and select the plug-in (32-bit or 64-bit). It is safe to install both.
3. Restart Management Client.

Operating systems

XProtect Mobile supports the following operating systems for mobile devices:

Operating system	Devices
Android 9.0 or newer	Smartphones and tablets with Android installed
iOS 14.0 or newer	iPhone, iPad, and iPod Touch

Install XProtect Mobile on a mobile device

On your mobile device, download the free XProtect Mobile application from Google Play or App StoreSM.

1. Find the app in the app store by searching for "XProtect Mobile" and then install it on your mobile device.

The XProtect Mobile logo icon appears on the screen of your device.

2. To run XProtect Mobile, tap the icon.



By default, a Milestone demo server installs. Use the server to test the app. The server is just for testing, so there are some things you can't do. For example, you can't use pan-tilt-zoom controls.

You can't delete or edit the demo server, but you can hide it from the server list. To hide the server, go to **Settings**, under **General**, enable the **Hide demo server** setting.

To view videos from your cameras, connect the app to one or more mobile servers (see [Connect your mobile device to a mobile server on page 17](#)).

Configuration

Configure user profiles on server (administrators)

You must enable certain user permissions to ensure that users of XProtect Mobile can use access control and view and respond to access requests on their smartphones or tablets. Depending on your VMS, the setup differs slightly.

In Management Client:

1. Expand **Security** and select **Roles**.
2. Select the role that you want to modify.
3. In **Role Settings**, click the **Access Control** tab.
4. If not already selected, select these check boxes:
 - **Use access control** - Required to view access control features in XProtect Mobile
 - **Receive notifications** - Required to receive access requests as push notifications
5. For each required role, repeat the steps above.
6. Save the changes.

Enable access request notifications in XProtect Mobile



To receive notifications from your VMS, you have to purchase a Milestone Care Plus license. Access request notifications are disabled by default.

In addition to the security settings on the server, you must also enable access request notifications in the server settings in the XProtect Mobile app. You must do this for all servers that the app is connected to.

1. Open your XProtect Mobile app, and then do the following:
 - Android - In the list of servers, go to the server that you want to connect to, tap , and then tap **Edit**.
 - iOS - In the list of servers, in the upper right-hand corner, tap **Edit**, and then tap the server that you want to connect to.
2. Under **Notifications**, enable the **Receive notifications** option per that server.
3. Tap **Notification settings** (iOS) or **Tap to configure** (Android) and enable **Access requests**.
4. Tap **Done**.

If you disable **Access requests**, you will not be notified about any access requests, and the list of access requests will disappear from the XProtect Mobile app.

Select a language for the app

By default, the XProtect Mobile app uses the language of your device. For example, if your device uses French, the XProtect Mobile client displays in French.

To use a different language, change the language of your device. Then, restart the XProtect Mobile app to apply the change.



To use the XProtect Mobile client in a specific language, your device must support that language.

Connect your mobile device to a mobile server

You can connect devices that are running Google Android or Apple iOS.

Requirements:

- Get network and user details from your system administrator.
- You have installed and opened the app.
- If you want to use an HTTPS connection, a digital certificate from a certificate authority (CA) must be installed on your XProtect Mobile server.



You cannot connect to the mobile server through your XProtect Mobile app if you use a self-signed certificate. If in doubt, ask your system administrator

Connect to a server that you have not used before

1. Open the XProtect Mobile app.
2. On the **Servers** screen:
 - Android - Tap **Add server** to scan the local network for mobile servers.
 - iOS - Tap **Edit**, then tap **Add server** to scan the local network for mobile servers.
3. You can choose to add the server manually by tapping **Add server manually**. The **Add server** screen opens.

1. Under **Server details**, enter a name for the server and its IP address. The server name shows in the list of servers on your device, and it can be anything you want.
2. Under **User details**, enter your user credentials. The user profile must be defined in the surveillance system by your system administrator.
3. Optionally, you can also do the following:
 - Enable **Automatic connection** - the setting allows you to connect to the mobile server even if the server address has changed.
 - Change the **Secure connection** setting. By default, the connection uses HTTPS, and the **Secure connection** setting is enabled. To use an HTTP connection, you must disable the setting.



To connect to a mobile server with an HTTP connection setting configured, you must disable the **Secure connection** setting on the app side. If in doubt, contact your system administrator.

- Enable the **Default server** setting to always connect to this mobile server when you start XProtect Mobile.
 - Enable the **Receive notifications** setting to be notified when alarms trigger or when there is a problem with a device (see [Enable or disable notifications on page 22](#)).
 - Enable **Save credentials** to avoid having to enter your credentials the next time you log in. You must also enable the setting to receive notifications.
4. To save your settings:
 - Android - Tap **Save server settings**.
 - iOS - Tap **Done**.
 5. On the **Servers** screen, tap the mobile server. The **Login** screen is displayed.
 6. Enter your login credentials for XProtect Mobile Server, and then tap **Log in** (see [Log in to the XProtect Mobile app on page 37](#)).

Connect to a server that you have used before

1. Open the XProtect Mobile app.
2. On the **Servers** screen:
 - Android - Tap **Add server** to scan the local network for mobile servers.
 - iOS - Tap **Edit**, then tap **Add server** to scan the local network for mobile servers.
3. The **Already Added Servers** group lists the servers that you have connected to before. Select one or more servers, and then tap  to save.

4. On the **Servers** screen, tap the mobile server. The **Login** screen is displayed.
5. Enter your login credentials for XProtect Mobile Server, and then tap **Log in** (see [Log in to the XProtect Mobile app on page 37](#)).

Connect by entering the unique identifier for the server



This connection method uses the Address book service and requires a Milestone Care Plus subscription package.

Ask your system administrator for the unique identifier for the server.

1. Open the XProtect Mobile app.
2. On the **Servers** screen:
 - Android - Tap **Add server** to scan the local network for mobile servers.
 - iOS - Tap **Edit**, then tap **Add server** to scan the local network for mobile servers.
3. Tap **Add server with ID**.
4. Enter the server ID and tap **Add server**.
5. On the **Servers** screen, tap the mobile server. The **Login** screen is displayed.
6. Enter your login credentials for XProtect Mobile Server and tap **Log in** (see [Log in to the XProtect Mobile app on page 37](#)).

Connect from an email



This connection method uses the Address book service and requires a Milestone Care Plus subscription package.

Your system administrator can send you an email that contains a unique identifier for the server. Use the identifier to connect your mobile device to a mobile server.

1. On your mobile device, find the email from your system administrator.
2. If XProtect Mobile is not installed, tap the **Download XProtect Mobile** link to go to the store where you can download it. Then, install the app on your device.
3. In the same email, tap **Add your server to XProtect Mobile**.
4. On the **Servers** screen, tap the mobile server. The **Login** screen is displayed.
5. Enter your login credentials for XProtect Mobile Server and tap **Log in** (see [Log in to the XProtect Mobile app on page 37](#)).

Connection settings for a mobile server (explained)

When you add a mobile server to your XProtect Mobile app, you must configure the following settings:

Setting	Description
Name	<p>The name of the server.</p> <p>The name displays in the list of servers on your device and can be anything you want.</p>
Address	<p>The IP address of the computer where XProtect Mobile Server is running. If you don't know the IP address, you can insert the host name of the computer.</p>
Port Secure port	<p>The port number that the XProtect Mobile client uses to communicate with the server. For non-secure connections, the default port is 8081. For secure connections, the default port is 8082.</p> <div style="border: 1px solid #ccc; background-color: #fff9e6; padding: 10px; margin-top: 10px;">  <p>If you edit the port number, you must also edit the corresponding port number on the server side. Otherwise, the XProtect Mobile app and the server cannot communicate.</p> </div>
Automatic connection	<p>The automatic connection makes it possible for you to connect to the mobile server even if the server address has changed. The setting is enabled by default.</p>
Secure connection	<p>Indicate whether you will use an HTTPS connection to connect to the mobile server. The setting is enabled by default.</p> <div style="border: 1px solid #ccc; background-color: #fff9e6; padding: 10px; margin-top: 10px;">  <p>If you disable the Secure connection setting on the app side, you need to ensure that the HTTPS connection setting on the mobile server side is also disabled. Otherwise, the XProtect Mobile app and the server cannot communicate.</p> </div> <p>If in doubt, ask your system administrator.</p>

Setting	Description
User name	Your user name.
Password	Your password. The user name and password can be based on either basic users set up in Management Client or on Windows users. Windows user credentials are specific to a machine or a domain.
Save credentials	Indicate whether you want XProtect Mobile to remember your user name and password for the next time you connect to an already added server. If you disable the setting, you will not receive any notifications.
Default server	Indicate whether to log in to this server when you open XProtect Mobile.
Receive notifications	Indicate whether you want to receive notifications. The setting is disabled by default. To receive notifications, you must enable the Save credentials setting.
Tap to configure (Android) Notification settings (iOS)	<p>Indicate the type of notifications that you want to receive:</p> <ul style="list-style-type: none"> • All alarms - You will be notified when any alarm is triggered, regardless of the alarm's owner or source. • My alarms - You will be notified when an alarm that you own is triggered or when someone assigns an alarm to you. • Disable Alarms - You will not be notified when events trigger alarms. However, you will be able to see those alarm events listed under Alarms.

View and edit connections to mobile servers

You can view and change settings for your connections to mobile servers if you, for example, want to change the type of connection or select another server as the default server.

1. On the **Servers** screen:

- Android - In the list of servers, tap  for the relevant mobile server, then tap **Edit** to open the **Edit server** screen.
- iOS - Tap **Edit**, then tap the relevant mobile server to open the **Edit server** screen.

2. View or edit the settings:

- **Automatic connection** - Makes it possible for you to connect to the mobile server even if the server address has changed. By default, this setting is enabled.
- **Secure connection** - Use HTTPS when you connect to a server. By default, the HTTPS connection is enabled.



If you want to use an HTTPS connection, a digital certificate from a certificate authority (CA) must be installed on your XProtect Mobile server. You cannot connect to the mobile server through your XProtect Mobile app if you use a self-signed certificate. If in doubt, ask your system administrator.

- **Server connections** - Lists the server addresses.
 - To add mobile server addresses manually, tap **Add address**. Enter the IP address and the port number for the mobile server, and then tap **Save address** (Android) or **Save** (iOS).
 - To delete mobile server addresses:
 - Android - Tap  for the relevant server address and tap **Delete**. Then, tap **Yes** to confirm.
 - iOS - Tap **Edit**, tap the relevant server address, and tap **Delete**. Then, tap **Save**.
- **User details** - The login credentials.
- **Save credentials** - Remember the login credentials.
- **Default server** - Always connect to this mobile server when you start XProtect Mobile.
- **Change password** - As a basic user, you can change your password whenever you want to (see [Log in to the XProtect Mobile app on page 37](#)).

Enable or disable notifications

If you have configured events and alarms in your surveillance system, XProtect Mobile can send you a notification when events trigger alarms or when something goes wrong with a device or server. If you have the app open, XProtect Mobile displays the notification in the app.

To receive notifications, you must enable the notifications setting on your mobile device.

Enable or disable notifications from a server

By default, notifications are disabled when you add a server. These notifications are delivered when you have the XProtect Mobile app open.

1. Open XProtect Mobile, and then do the following:

- Android - In the list of servers, go to the server that you want to connect to, tap , tap **Edit**, and then under **Notifications**, enable or disable **Receive notifications** per that server.
- iOS - In the list of servers, in the upper right-hand corner, tap **Edit**. Tap the server that you want to connect to, and then under **Notifications**, enable or disable **Receive notifications** per that server.



If you disable **Receive notifications**, you will receive server status notifications only. To receive notifications, you must enable the **Save credentials** setting.

2. To specify the alarms that you will be notified about, tap **Notification settings** (iOS) or **Tap to configure** (Android), and then do one of the following:

- Enable **Alarms**:
 - Select **All alarms** - You will be notified when any alarm is triggered, regardless of the alarm's owner or source.
 - Select **My alarms** - You will be notified when an alarm that you own is triggered or when someone assigns an alarm to you.
- Disable **Alarms** - You will not be notified when events trigger alarms. However, you will be able to see those alarm events listed under **Alarms**.

3. To save your changes:

- Android - Tap **Save server settings**.
- iOS - Tap **Done**.

Enable push notifications



Push notifications are available only if you have purchased a Milestone Care Plus license.

If you want XProtect Mobile to notify you even when you don't have the app open, enable push notifications. Push notifications are sent to your mobile device. Settings for notifications on your mobile device determine how you are notified. For example, it can display a banner or play a distinctive sound.

1. Open XProtect Mobile and follow the steps above to enable notifications from a server.
2. To enable push notifications:
 - Android - On the **Servers** screen, tap , then under **General**, enable the **Push notifications** setting.
 - iOS - Go to the settings of your device. Tap **XProtect Mobile**, then tap **Notifications**. Enable the **Allow Notifications** setting.

Buttons and settings overview

This topic lists and describes buttons and settings in the XProtect Mobile app. If you see something in the app that you're not sure how to use, you can look it up here.

After you start the app, the **Servers** screen contains the following settings:

Name	Description
Add server	Scan the local network for available mobile servers.
Add server with ID	Add a server using a unique server identifier. This connection method uses the Address book service and requires a Milestone Care Plus subscription package.
Add server manually	Enter a name for the server, its IP address, and user login credentials.
 (Android) Edit (iOS)	<ul style="list-style-type: none"> • Edit - Edit settings for the server. • Delete - Delete the server from the list. • Connect (Android) - Connect to the server.
 (Android) Settings (iOS)	View or change:

Name	Description
	<ul style="list-style-type: none"> • General settings: <ul style="list-style-type: none"> • Stay awake - Enable to keep the screen awake while streaming video. • Hide demo server - Enable to hide the demo server from the server list. • Provide usage data - Enable to help us deliver excellent services to you. You must not enable data collection if you want the system to have an EU GDPR-compliant installation. For more information about data protection and the usage data collection, see the GDPR privacy guide. • Push notifications - Enable to receive push notifications in the app (Android).

Name	Description
	<ul style="list-style-type: none"> • Video quality settings: <ul style="list-style-type: none"> • Frames per second - Lower FPS will reduce the bandwidth usage. • Optimize bandwidth or image quality - Enable to reduce bandwidth usage. Disable to increase image quality. • Use lower video resolution - Enable to allow for higher FPS rates. • Allow direct streaming on device - Allow to improve the video quality. Direct streaming is only available if enabled on the server. • Use keyframes only in live video from multiple cameras - Enable to use keyframes only and to reduce the usage of CPU power. Disable to use all frames and higher FPS rates. • Video diagnostics overlay - Enable to view the FPS (frames per second), the codec, the resolution, and the type of streaming of the video stream in the selected view. The feature displays the information as an overlay to the video and can help you to troubleshoot XProtect Mobile client issues related to the video stream and performance issues. • Controls settings: <ul style="list-style-type: none"> • Autohide video controls - Hide the video controls after a period without activity. • Default PTZ controls - Select the preferred default setting for the PTZ control. <p>Find more information about using the XProtect Mobile app by tapping the Help link.</p>

After you log in to a server, the top bar in Android and the bottom tabs in iOS can contain the following options:



The options are available only if you have been given permission to view them, which happens in Management Client.

Name	Description
<p>Views (Android)</p>  (iOS)	<p>View the available views of cameras on the Home screen. Select the view that you want to play video from (live or recorded). The available views are organized in folders:</p> <ul style="list-style-type: none">  (Android)  (iOS) <p>These folders can contain other folders with views or separate views with cameras -  (Android) or  (iOS). The views can only contain cameras.</p>
<p>Cameras (Android)</p>  (iOS)	<p>View the available cameras listed in the All cameras view.</p>
<p>Investigations (Android)</p>  (iOS)	<p>View investigations created in XProtect Web Client or XProtect Mobile client.</p>
<p>Bookmarks (Android)</p>  (iOS)	<p>View the list of bookmarks. You can also:</p> <ul style="list-style-type: none"> Edit the bookmark details -  (Android) or Edit (iOS). Delete the bookmark -  (Android) or Delete (iOS).
<p>Actions (Android)</p>  (iOS)	<p>Access outputs and events to activate them.</p>
<p>Alarms (Android)</p>  (iOS)	<p>View and react to alarms.</p>

Name	Description
 (Android)  (iOS)	<p>Video push lets you use the camera on your mobile device to stream video with audio to your surveillance system.</p> <p>On the Video push screen, go to  (Android) or Settings (iOS) to view or change:</p> <ul style="list-style-type: none"> • Video resolution - Select the resolution of the video stream to push. • Automatic image quality - Enable to adjust the image quality automatically. If you disable the setting, then you can set the image quality to Low, Medium, or High. • Location data - Add location data to the video stream. • XProtect Corporate • XProtect Expert • XProtect Professional+ • XProtect Express+ • XProtect Essential+
 (Android)  (iOS)	<p>Filter camera views or bookmarks. By default, all views and bookmarks are selected.</p>
	<p>Search for a view or a specific camera.</p> <ul style="list-style-type: none"> • Enter ptz to find all your PTZ cameras. • Enter audio to find all your cameras that have microphones attached. • Enter ptt to find all your cameras that have speakers.

In live mode, you can use these buttons to do the following:

Name	Description
 (Android)  (iOS)	View a list of actions for the selected camera.
 (Android)  (iOS)	Go to PTZ mode. Shows PTZ controls on the screen so you can pan, tilt and zoom in on the selected camera. Dimmed for non-PTZ cameras.
 (Android)  (iOS)	View the PTZ preset positions on the selected camera (for PTZ cameras only).
 (Android)  (iOS)	<p>Take a snapshot of the current frame. Snapshots are saved as follows:</p> <ul style="list-style-type: none"> • Snapshots are saved to your device's SD card at /mnt/sdcard/Milestone (Android). • Snapshots are saved to your device's Photo Library and can be accessed by tapping Photos on your device (iOS). <p>You cannot change the save locations.</p>
 (Android)  (iOS)	Start or stop listening to incoming audio from cameras that have microphones attached.
	Start or stop using the push-to-talk (PTT) feature with cameras that have speakers.
 (Android)  (iOS)	Add a bookmark to live videos to quickly locate relevant video sequences (see Viewing live video on page 39).
 (Android)  (iOS)	Switch from live mode to playback mode.

In playback mode, you can use these buttons to do the following:

Name	Description
 (Android)  (iOS)	View a list of created video recordings.
 (Android)  (iOS)	Turn on and turn off a small picture-in-picture (PiP) for live mode. Tap the button again or double-tap the PiP view to return to live mode.
 (Android)  (iOS)	Create an investigation.
 (Android)  (iOS)	Play a video recording forwards.
 (Android)  (iOS)	Play a video recording backward.
 (Android)  (iOS)	Pause playing a video recording.
 (Android)  (iOS)	Go forward to the next sequence or go back to the previous sequence.
 (Android)  (iOS)	Go one frame forward or one frame backward in the sequence.
	Go to a specific time in a video recording.

Name	Description
X1	Open a selection of playback speeds.
 (Android)  (iOS)	Play back audio from cameras that have microphones and speakers attached.
 (Android)  (iOS)	Take a snapshot in playback mode.
 (Android)  (iOS)	Add a bookmark to recorded videos to quickly locate video sequences (see Find and view video recordings on page 51).
 (Android)  (iOS)	Go back to live mode.

Streaming video from your mobile device (explained)

Video push lets you stream live video with audio from the camera on your mobile device to your XProtect surveillance system.

This is useful, for example, to collect evidence when you examine an incident.

	<p><i>"When would I want to stream video from my mobile device?"</i></p>
---	--

- A crowd is forming at an entrance, and you want to show the control room.
- You have witnessed a crime and want footage of the perpetrator.
- You are interviewing a witness and want to record the response.
- A guard is handling a situation, and you want to document his actions.

Your administrator must set up video push

Before you can use video push, your administrator must do the following in Management Client:

- Add a channel to the mobile server.
- Add the Video Push Driver as a hardware device.
- Enable the microphone related to the camera that you use for video streaming.
- Specify the users who can stream video from a device.



Video push is available in landscape and portrait mode.

For more information, see the [administrator manual for XProtect VMS](#).

Set up video streaming on your mobile device

Settings for Android

On the **Video Push** screen, tap .

On the **Video push settings** screen, specify the following:

- **Video resolution** - The options for setting the resolution of the video stream are **Low**, **Medium**, **High**, or **HD**.
- **Automatic image quality** - Enable to adjust the image quality of the video stream automatically.
- You can also set the image quality of the video stream to **Low**, **Medium**, or **High**.
- **Location data** - Enable to include details about where you are while you stream the video. This requires that you turn on location information on your device. Only available for:
 - XProtect Corporate
 - XProtect Expert
 - XProtect Professional+
 - XProtect Express+
 - XProtect Essential+

Settings for iOS

On the **Video Push** screen, tap **Settings**.

On the **Video push settings** screen, specify the following:

- **Video resolution** - The options for setting the resolution of the video stream are **Low**, **Medium**, **High**, or **HD**.
- **Image quality** - Select whether to allow XProtect Mobile to adjust the image quality automatically or to set it to **Low**, **Medium**, or **High**. By default, the **Automatic** image quality is enabled. This can affect the quality of the video.



The XProtect Mobile client will change the compression of the images trying to maintain a stable number of frames per second even on slow connections. This is different from the server-side quality of service, which is used when viewing live video.

- **Location data** - Enable to include details about where you are while you are streaming the video. Only available for:
 - XProtect Corporate
 - XProtect Expert
 - XProtect Professional+
 - XProtect Express+
 - XProtect Essential+

Listening to incoming audio (explained)

XProtect Mobile client supports incoming audio when you:

- View live video (see [Viewing live video on page 39](#)).



You can play the incoming live audio from microphones attached to cameras even when there is no live video streaming from these cameras.

- Play back video recordings (see [Find and view video recordings on page 51](#)).

The incoming audio is also available in:

- Investigations (see [View or create an investigation on page 54](#))
- Alarms (see [View alarms on page 57](#))
- Access control (see [View doors and take action on page 59](#), [Respond to access requests on page 60](#), [Investigate access control events on page 62](#))
- Bookmarks (see [Bookmarks \(usage\) on page 41](#)).

Push-to-talk (explained)

The feature allows you to communicate through the XProtect VMS from the microphone of your mobile device with people near a video camera with audio equipment. You can also listen to the recorded conversations in playback mode.

XProtect Mobile client supports the push-to-talk (PTT) feature:

- While you are watching live video from one camera (see [Viewing live video on page 39](#)).
- When you play the recorded outgoing audio in video recordings (see [Find and view video recordings on page 51](#)).
- In investigations (see [View or create an investigation on page 54](#)).
- In alarms (see [View alarms on page 57](#)).
- In access control (see [View doors and take action on page 59](#), [Investigate access control events on page 62](#) and [Respond to access requests on page 60](#)).



You must allow the XProtect Mobile app to have access to the microphone of your mobile device (see [Requirements for using push-to-talk on page 11](#)).

When the push-to-talk (PTT) feature is available for use, you will see the **Push-to-talk** button on the camera toolbar. Its icon has the following states:

Icon	Description
 (Available)	In live mode, it shows that the push-to-talk (PTT) feature is available and that you fulfilled the necessary requirements for using it. Tap and hold to start using push-to-talk. Release the button to end transmitting audio.
 (Active)	In live mode, it shows that you are currently using the push-to-talk (PTT) feature. The microphone of your mobile device and the speaker of the video camera are in an active state. The blue pulsating circle indicates the sound level.
 (Disabled)	In live mode, it shows that the push-to-talk (PTT) feature is available but that you did not fulfill the necessary requirements for using it (see Requirements for using push-to-talk on page 11).

Icon	Description
 <p>(Android)</p>  <p>(iOS)</p>	<p>In playback mode, when you tap  (Android) or  (iOS), it shows that you can listen to incoming and outgoing recorded audio while playing back a video recording and that you can select the audio source that you want to listen to.</p>

Rules for interrupting push-to-talk

Based on the level of your user permissions (Administrators or Operators), there are two rules for interrupting a push-to-talk session in live mode:

- Users with the same level of user permissions cannot interrupt each other.
- Users with a lower level of user permissions (Operators) cannot interrupt users with a higher level of user permissions (Administrators).

Direct streaming (explained)

XProtect Mobile supports direct streaming in live mode.

Direct streaming is a video streaming technology that transfers video from an XProtect system to the clients directly in H.264 codec, which is supported by most modern IP cameras. Direct streaming does not require any transcoding and, therefore, removes some of the stress on the XProtect system.

The direct streaming technology is in contrast to the transcoding setting in XProtect, in which an XProtect system decodes video from the codec that is used on the camera into JPEG files. Enabling the feature results in reduced CPU usage for the same configuration of cameras and video streams. Direct streaming also increases streaming performance for the same hardware – up to five times as many concurrent video streams compared to transcoding.

You can also use the direct streaming feature to transfer video from cameras that support the H.265 codec directly to the XProtect Mobile client.

You can use direct streaming in the single-camera view, the grid view, and picture-in-picture (PiP).

The video stream falls back from direct streaming to transcoding if:

- The direct streaming feature has been disabled in Management Client, or the requirements have not been fulfilled (see [Requirements for direct streaming on page 12](#)).
- The codec of the streaming camera is different than H.264 or H.265.
- The video cannot start playing for more than four seconds.
- The connection with the server or with the camera has been lost.
- You use the privacy masking feature during live video.

Adaptive streaming (explained)

XProtect Mobile supports adaptive streaming in live mode.

Adaptive streaming is useful when you view multiple live video streams in the same view of cameras. The feature optimizes the performance of the XProtect Mobile server and improves the decoding capability and performance of devices that are running XProtect Mobile client and XProtect Web Client.

To take advantage of adaptive streaming, your cameras must have multiple streams defined with different resolutions. In this case, the feature allows you to:

- Optimize video quality - selects the stream with the lowest available resolution that is equal to or higher than the requested resolution.
- Optimize server performance - reduces the requested resolution and then selects the stream with the lowest available resolution that is equal to or higher than the reduced request.
- Optimize resolution for low bandwidth - selects the stream with the lowest available resolution (recommended if you use 3G or an unstable network).



When zooming, the live video stream requested is always the one with the highest available resolution.



Bandwidth usage is often reduced when the resolution of the requested streams is reduced. Bandwidth usage also depends on other settings in the configurations of the defined streams.

For more information, see the [administrator manual for XProtect VMS](#).

Operation

Log in to the XProtect Mobile app

First-time login

You can log in to the XProtect Mobile app as a basic user or as a Windows user. Your system administrator defines the authentication login method in XProtect Management Client.



Milestone recommends that you use a secure connection when you manage your user credentials.

To log in as a basic user, you must change the temporary password that your system administrator has given you:

1. Tap the XProtect Mobile app icon.
2. From the list of servers, tap the mobile server that you want to connect to. A dialog box appears.
3. Tap **Continue** to open a new window.
4. Follow the instructions that are shown in the **Set a new password** wizard and save your new password.
5. After you have saved your changes, you will be redirected back to the **Servers** screen.
6. From the list of servers, tap the relevant mobile server. The **Login** screen is displayed.
7. In the **User name** and **Password** fields, enter your login credentials.
8. (Optional) Tap **Save credentials** to remember your user name and password for your next login.
9. Tap **Log in**.

10. (Optional) If your system administrator has set up two-step verification for your user account, you are asked for a verification code, which the system sends to your email address. If in doubt, ask your system administrator for the email address.
 1. Open your email program and make a note of the numbers.
 2. Enter the code in the XProtect Mobile app and tap **Log in**.



If you do not use the verification code within a specific period of time (the default period of time is five minutes), the verification code times out. You can then request a new code on the screen where you enter the code.



If you exceed the number of allowed code entry attempts (the default number is three), you will be blocked from making more attempts. In that case, you must log out of the XProtect Mobile app and log in again.



If your system administrator forces you to change your password on the next login, follow the steps listed above to log in.

To log in as a Windows user:

1. Tap the XProtect Mobile app icon.
2. From the list of servers, tap the mobile server that you want to connect to.
3. In the **User name** and **Password** fields, enter your Windows user credentials.



Windows user credentials are specific to a machine or a domain.

4. Tap **Log in**

Change password



To be able to manage your user credentials, you must use XProtect VMS 2021 R1 or later.

Changing your password often increases the security of your XProtect VMS system. If you log in as a basic user, you can change your password whenever you want to, or your system administrator can force you to change your password. If you use the Windows authentication method, only your system administrator can change your password.

1. To change your password, go to the **Servers** screen of the XProtect Mobile app.
 - Tap the relevant mobile server, then tap **Edit**. The **Edit** screen is displayed.
 - If you haven't saved your current credentials, tap the relevant mobile server. The **Login** screen is displayed.
2. Tap **Change password** to open a new browser window.
3. Follow the instructions in the **Set a new password** wizard and save your new password.
4. After you save your changes, you'll be redirected back to the **Servers** screen in the XProtect Mobile app.
5. From the list of servers, tap the relevant mobile server. The **Login** screen is displayed.
6. In the **User name** and **Password** fields, enter your login credentials.
7. (Optional) Tap **Save credentials** to remember your user name and password for your next login.
8. Tap **Log in**.



If you have forgotten your current password, you must contact your system administrator. The system administrator will force you to change your password on your next login.



If you have made many unsuccessful login attempts, your account will be locked out. You can either wait for the lockout time to expire or contact your system administrator. The administrator can enable your account again and, in addition, may force you to change your password on the next login.

Viewing live video

You can view video only on cameras that are set up in views in XProtect Smart Client. You cannot create views in XProtect Mobile. Also, the XProtect Mobile client displays only video. If a view in XProtect Smart Client contains other types of content, such as maps, text, or HTML pages, the content does not display.

When you connect to a server, the XProtect Mobile client lists your views.

- Android - To access your views, tap **Views**.
- iOS - To access your views, tap .

On the **Home** screen, the available views are organized in folders:

-  (Android)
-  (iOS)

These folders can contain other folders with views or separate views with cameras -  (Android) or  (iOS). The views can only contain cameras.

The list of views offers the following information:

- The name of the folder. This can be **Shared** - with views that everyone can access, or **Private** - with views that you have set up in XProtect Smart Client, and only you can access.
- The name of the view. For example, Building A.
- The number of cameras available in the view.

Start viewing live video from a camera

1. Tap a view to display the cameras that it contains.
2. Tap the preview image for the camera.
3. Optional. Tap  (Android) or  (iOS) to start playing audio. Tap  (Android) or  (iOS) to stop playing audio (Only for cameras that have microphones attached).
4. Optional. Tap and hold  to start push-to-talk. Release the icon  to end transmitting audio (Only for cameras that have speakers).
5. Optional. Tap  (Android) or  (iOS) to add a bookmark to quickly locate relevant video sequences (see [Bookmarks \(usage\) on page 41](#)).

Stop viewing live video from a camera, or view another camera

To stop viewing live video:

- Android - Tap 
- iOS - Tap 

To view video from another camera in the view:

- Swipe right or left.

Camera indicators

The camera indicators show you if the camera is detecting motion, recording video, or both. The camera indicators are visible in the camera title bar.

Symbol	Is motion being detected?	Is the video being recorded?
	⊗	⊗
	☑	⊗
	⊗	☑
	☑	☑

Search for a specific camera

If you have lots of views and cameras, you can find a camera by searching for the camera name.

1. Above the list of views, tap .
2. Enter the name of the camera.

Bookmarks (usage)

This feature is only available in certain XProtect VMS products. See the complete feature list, which is available on the product overview page on the Milestone website (<https://www.milestonesys.com/solutions/platform/product-index/>).

You can use bookmarks to quickly locate relevant video sequences. You can use the feature in both live mode (see [Viewing live video on page 39](#)) and playback mode (see [Find and view video recordings on page 51](#)) or while you use video push (see [Stream video from your device to your surveillance system on page 56](#)).

Bookmarks (explained)

A bookmark is, essentially, a small video clip. When you bookmark an incident, the system automatically assigns it an ID and adds the user who created the bookmark.

A bookmark video clip typically contains video from a few seconds before and a few seconds after the bookmarked incident (the time interval is specified by the system administrator) to ensure that the incident is recorded, regardless of any delays.



Depending on your user permissions, you may not be able to add bookmarks from certain cameras due to restrictions. You may be able to view bookmarks even if you cannot add them, and the other way around.

View the bookmark details or play the bookmark video clip

In the XProtect Mobile app, you can create detailed bookmarks to make it easier to find the bookmarks after you have created them.

To view the details of the bookmark that you have added and to play the bookmark video clip:

1. On the **Home** screen, tap **Bookmarks** (Android) or  (iOS) to open the bookmarks list.
2. On the **Bookmarks** screen, select **All bookmarks** to open the complete list of bookmarks created by all users or **My bookmarks** to open a list of bookmarks that only shows those bookmarks that you have created yourself.
3. Optional. If the list of bookmarks is too long, tap **Load more**.
4. Optional. To make the search easier, you can filter the list of bookmarks (see [Filter your bookmarks on page 46](#)).

5. Navigate to the bookmark that you want to view, then tap on it. The **Bookmark details** screen opens.
6. To play the bookmark video clip, tap on the video.
7. On the **Bookmark details** screen, you can view:

Name	Description
Headline	The headline of the bookmark that must contain a maximum of 50 characters. The field is required.
Description	The additional description of the bookmark. The field is optional.
Start time	The suggested start time of the bookmark clip is a number of seconds before the time of the bookmark event. The start time is specified by the system administrator.
Bookmark event	The time in the video clip that shows when the bookmark event was triggered.
End time	The suggested end time of the bookmark clip is a number of seconds after the time of the bookmark event. The end time is specified by the system administrator.
Bookmark ID	A unique ID number that is assigned to the bookmark automatically.
Added by	The user who has created the bookmark.
Camera name	The name of the camera that streams the bookmark video clip.
Duration	The duration of the bookmark video clip.
See live video	Tap to return to the video in live mode.

Add or edit bookmarks

You can add bookmarks to live videos and video recordings.

Steps to add bookmarks to videos in live mode:

1. Tap **Views** (Android) or  (iOS), then select the required camera in the view.
2. Tap  (Android) or  (iOS). The bookmark is added with the name **Quick bookmark** assigned by the system automatically.
3. Optional. To change the bookmark name, tap **Edit** on the success message. The **Edit bookmark** screen opens.
 1. In the **Headline** field, enter a name for the bookmark. You can also change the name later.
 2. Optional. Describe the incident. You can also change the description later.
 3. Tap **Save**.



The **Duration** of a bookmark clip is determined on the surveillance system server.

Steps to add bookmarks to videos in playback mode:

1. Select the required camera in the view and switch to playback mode.
2. Tap  (Android) or  (iOS). The **Add bookmark** screen opens.
3. In the **Headline** field, enter a name for the bookmark. You can also change the name later.
4. Optional. In the **Description** field, describe the incident. You can also change the description later.
5. Tap  (Android) or **Save** (iOS).



The **Duration** of a bookmark clip is determined on the surveillance system server.



Depending on your user permissions, you can find the added bookmarks on the timeline of the video recording.

Steps to edit bookmarks

1. On the **Bookmarks** screen, navigate to the bookmark that you want to edit, then tap on it. The **Bookmark details** screen opens.
2. To edit the bookmark, tap  (Android) or **Edit** (iOS). The **Edit bookmark** screen opens.
3. In the **Headline** field, enter a name for the bookmark.
4. Optional. Describe the incident.

- Optional. Although the time of the bookmark event and the start and end time of the video clip are specified by the system administrator, you can adjust these settings. To do that, navigate to the time setting that you want to edit and tap . The **Edit time frame** screen opens. The time setting that you want to edit is highlighted in yellow.
 - Drag the time indicator of the setting to the desired position on the timeline. You can also edit the time frame by tapping  on the timeline to open the time picker.
 - Optional. On the **Edit time frame** screen, repeat the step above to edit the other two time settings of the bookmark. The bookmark event time must be between the start time and the end time of the video clip.
- Tap  (Android) or **Save** (iOS).



The **Duration** of a bookmark clip is determined on the surveillance system server.

Delete bookmarks

Depending on your user permissions, you can delete bookmarks created by yourself or others. If you delete a bookmark, it is removed from the database, and you can no longer access it.

Steps to delete bookmarks:

- On the **Edit bookmarks** screen, tap  (Android) or **Delete** (iOS).
- On the confirmation message, tap **Delete**.
- Optional. Tap the bookmark you want to delete and swipe it to the left.

Use the filter

Filter your views

If you want to see a particular type of view only, or if you want to display fewer views, you can apply a filter. All views are displayed when you tap the filter, regardless of whether they are shown or filtered. You can always choose to include a view again.

How you filter views depends on the operating system on your device. To filter views:

1. On the **Home** screen:

- Android - In the upper-right corner, tap . If a filter is already applied, the icon has a check mark .
- iOS - In the upper-right corner, tap . If a filter is already applied, the icon is blue .

2. To include or exclude a view, tap the view or use the slider.

3. To apply the filter and return to the list of views:

- Android - In the upper-right corner, tap .
- iOS - In the upper-right corner, tap **Done**.

Discard filter selections

If you haven't saved your selections yet, you can discard them:

- Android - In the upper-left corner, tap .
- iOS - Undo your selections manually.

Filter your bookmarks

To find a specific bookmark, you can search and use filtering. There are three options for filtering bookmarks:

- You can enter a keyword from the headline, the description, or the complete ID of the bookmark.
- You can select specific cameras.
- You can select a predefined time interval. You can also customize the time interval that you want to apply as a filter.

Steps to filter bookmarks by a keyword

1. On the **Bookmarks** screen:

- Android - In the upper-right corner, tap . If a filter is already applied, the icon has a check mark .
- iOS - In the upper-right corner, tap . If a filter is already applied, the icon is blue .

2. On the **Filter bookmarks** screen, in the **Keywords** field, enter a keyword from the headline or description of the bookmark or enter the complete bookmark ID.

3. To apply the filter and return to the list of bookmarks:
 - Android - In the upper-right corner, tap .
 - iOS - In the upper-right corner, tap **Apply**.
4. Optional. To undo your filter selection, tap **Clear all filters**.

Steps to filter bookmarks by selected cameras

1. On the **Bookmarks** screen:
 - Android - In the upper-right corner, tap . If a filter is already applied, the icon has a check mark .
 - iOS - In the upper-right corner, tap . If a filter is already applied, the icon is blue .
2. On the **Filter bookmarks** screen, tap **Select cameras**. The **Cameras** screen opens, and the list of all available cameras is displayed.
3. Optional. To quickly find specific cameras, use the **Search** option.
4. From the camera list, select the cameras that you want to apply as a filter. To undo your selection, tap the selected cameras.
5. Optional. To select all cameras in the list, use the **Select all** option. To undo your selection, tap **Deselect all**.
6. To navigate back to the **Filter bookmarks** screen after you have finished your selection, tap  (Android) or **Filters** (iOS).
7. To apply the selected cameras as a filter and return to the list of bookmarks:
 - Android - In the upper-right corner, tap .
 - iOS - In the upper-right corner, tap **Apply**.
8. Optional. To undo your filter selection, tap **Clear all filters**.

Steps to filter bookmarks by predefined or custom time intervals

You can filter the list of your bookmarks by using a specific time frame with predefined or custom time intervals between the start time and the end time of the video sequences that you have bookmarked. The default duration of the time frame is set to **2 hours**.

1. On the **Bookmarks** screen:

- Android - In the upper-right corner, tap . If a filter is already applied, the icon has a check mark .
- iOS - In the upper-right corner, tap . If a filter is already applied, the icon is blue .

2. On the **Filter bookmarks** screen, to specify the time frame:

- Android - Select the **Show specific time frame** check box.
- iOS - Enable the **Show specific time frame** setting.

3. To open the list of predefined time intervals:

- Android - Tap the **Predefined time intervals** list.
- iOS - Tap the **Predefined time intervals** link.

4. Select one of the following time intervals:

- **Last 2 hours**
- **Last 6 hours**
- **Last 12 hours**
- **Last 24 hours**
- **Yesterday**
- **Last 7 days**

5. Optional. To customize the time interval between the start time and the end time of the video sequence that you have bookmarked, tap .

6. To apply the filter and return to the list of bookmarks:

- Android - In the upper-right corner, tap .
- iOS - In the upper-right corner, tap **Apply**.

7. Optional. To undo your filter selection, tap **Clear all filters**.

Interact with live video in full screen

Use pan-tilt-zoom controls and PTZ presets

If you're viewing video from a pan-tilt-zoom (PTZ) camera, tap  (Android) or  (iOS) to use the PTZ controls. Tap controls once to pan or zoom one step.

If your administrator created PTZ presets for the PTZ camera in Management Client, you can use PTZ presets on your device in PTZ mode. PTZ presets are predefined positions in the view.

How you access PTZ presets depends on the operating system on your device.

- Android - Tap .
- iOS - Tap .

From the **PTZ presets** list, select a preset to start using it.

Zoom in or out

You can zoom in or out to get a better look at the video.

- To zoom in, pinch out or tap .
- To zoom out, pinch in or tap .

XProtect Mobile uses digital zoom.

Crop or fit images to the screen

You can resize images to fit them to your screen, or you can crop them. By default, images are fitted to the screen.

The outer parts of images are removed. Tap twice to crop images to fill the screen and preserve the image's aspect ratio.

Display other cameras in the view

If your view contains other cameras, you can swipe right or left to display their video.

Switch to playback mode

If you are recording and something happens that you want to review, you can switch to playback mode to review the footage or start an investigation.

To switch to playback mode:

- Android - Tap .
- iOS - Tap .



To keep an eye on the live video while you are investigating, turn on picture-in-picture by tapping . To turn off the picture-in-picture option, tap again.

Use picture-in-picture

If you see something that you want to investigate, but you don't want to stop observing the current situation, you can display live video using picture-in-picture (PiP) and play back video at the same time.

To turn on picture-in-picture (PiP):

1. Switch from live mode to playback mode by tapping (Android) or (iOS).
2. Depending on the operating system on your device:
 - Android - Tap .
 - iOS - Tap .



Incoming audio is not available in PiP.



To move the PiP window, tap and hold, and drag the PiP window to the preferred place on the screen.

Return to live video

To view the live video in full screen:

- Double-tap the PiP window.
- Tap (Android) or (iOS).

Take a snapshot

When you view a live video or play it back, and you find something that is of interest, you can take a snapshot of that content on your device.



If you don't have sufficient user permissions, you will not be able to take snapshots when using the XProtect Mobile app. If in doubt, ask your system administrator.

Snapshots are saved on your mobile device.

- Android - View snapshots on your device's SD card at /mnt/sdcard/Milestone.
- iOS - View snapshots in the **Photo Library**.



You cannot change the save locations.

To take a snapshot in live mode or playback mode:

- Android - Tap .
- iOS - Tap .

Find and view video recordings

In playback mode, you can access the recorded video from a camera.

View video recordings from a camera

How you access recordings depends on the operating system of your device.

1. In the view that contains the camera, tap the preview image for the camera.
2. Tap  (Android) or  (iOS).
3. To view a list of recordings from the camera:
 - Android - Tap .
 - iOS - Tap .

Playing back recorded video

Use the timeline controls to play back the recorded video. Controls are shown or hidden depending on what you are doing.

-  - Tap to open the time picker or scroll the timeline to go to a specific time in the recording (see [Using the playback timeline \(explained\) on page 53](#)).
-  - Speed up or slow down the playback.
-  (Android) or  (iOS) - Play the video backward or forwards, and pause the video by tapping

-  (Android) or  (iOS).
-  (Android) or  (iOS) - Go to the previous or next sequence.
-  (Android) or  (iOS) - Go one frame forward or one frame backward in the sequence.

In playback mode, you can also:

-  - Hide or display live video from the camera in a picture-in-picture window (see [Use picture-in-picture on page 50](#)).
-  (Android) or  (iOS) - Add a bookmark to quickly locate relevant video sequences (see [Bookmarks \(usage\) on page 41](#)).



Depending on your user permissions, you can find the added bookmarks on the timeline of the video recording.

Playing back audio in video recordings (For cameras that have microphones and speakers attached)

To listen to recorded incoming audio and outgoing audio, tap  (Android) or  (iOS) to open the **Audio sources** list and select the audio device that you want to listen to while playing back the video recording.

The options are:

-  **All sources** - Listen to both the recorded incoming and outgoing audio.
-  **Microphone** - Listen to the incoming audio only.
-  **Speaker** - Listen to the outgoing audio only.
-  **Audio off** (default)



You can play back audio only when there is a video recording, and you play the recording forward at normal speed.


Load more recordings

In the **Recent history** (iOS) or **History** (Android) lists, if you don't find the sequence that you want and more recordings are available, you can load more and keep investigating.

- Android and iOS - Tap **Load more**.


Using the playback timeline (explained)

On the timeline bar, you can specify the time of the recording, when you want to play back a recording, or when you want to view an investigation.

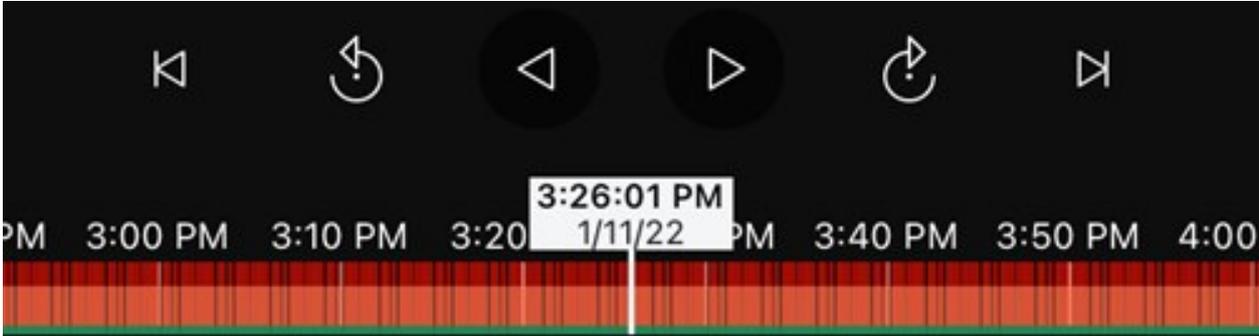


To do that in playback mode:

- (Android) On the timeline bar, tap the blue time indicator to open the time picker and select the start time of the part in the recording that you want to play back. Then tap **OK**. The recording loads at the selected start time.

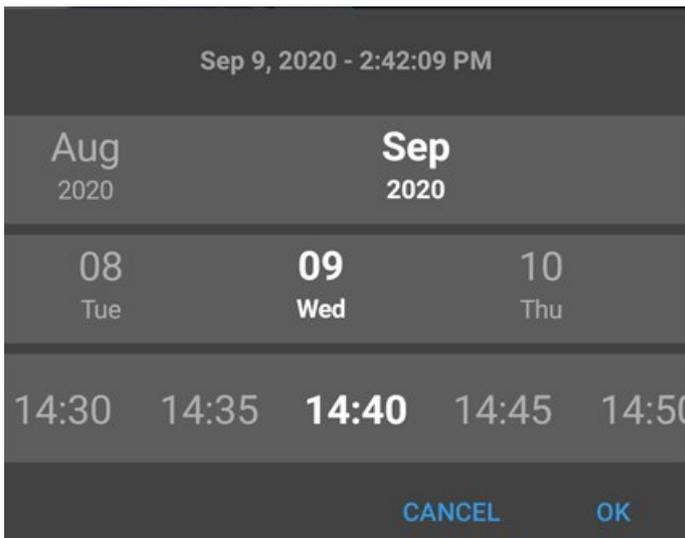

- (iOS) On the timeline bar, tap the blue time indicator to open the time picker and select the start time of that part in the recording that you want to play back. Then tap **Done**. The recording loads at the selected

start time.

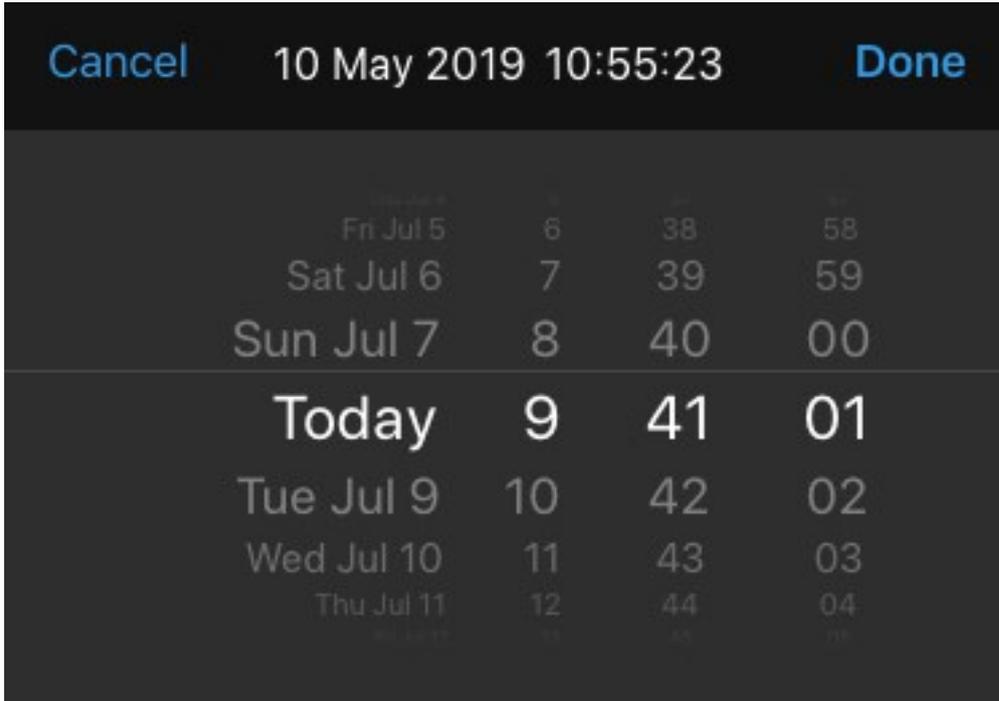

- On the timeline bar, drag the time scroller to the right or to the left to adjust the start time of that part in the recording that you want to play back. In the center of the time scroller, the blue time indicator shows the selected time in the recording. While you drag the time scroller, you see the frames currently selected in the recording. When you stop dragging the time scroller, the recording that you want to play back loads at the selected start time.

The maximum time period displayed on the timeline is 24 hours, with a four-hour time interval between frames. The minimum time interval between frames is one minute.

Colors in the timeline

- Light red indicates recordings.
- Red indicates motion.
- Light green indicates incoming audio.
- Green indicates outgoing audio.

In an investigation, you can follow the same steps to specify the time in the investigation that you want to view.

View or create an investigation

If you are using investigations in XProtect Web Client, you can use XProtect Mobile to view and create investigations. You can preview video from investigations, but you cannot download it to your mobile device.

View ongoing and completed investigations

How you access investigations depends on the operating system of your mobile device.



You can quickly refresh the list of investigations by swiping down from the top. You need to be at the top of the list. Otherwise, you will scroll instead.

1. To go to investigations:
 - Android - Tap **Investigations**.
 - iOS - On the **Navigation** pane, tap .
2. Optional: On the **Investigations** screen, you can filter investigations:
 - **My investigations** - View your investigations.
 - **All investigations** - View your investigations and those that other people created. Your administrator must enable you to do this.
3. To see the details of an investigation, tap the investigation.
4. To view the video in the investigation:
 - Tap  (Android) or  (iOS).
5. To go to a specific time period in the investigation, on the timeline bar, tap  to open the time picker or scroll the timeline to go to a specific time in the recording (see [Using the playback timeline \(explained\) on page 53](#)).

Create an investigation

When you create an investigation, the video is saved on the mobile server that you are connected to, not on your mobile device. To view the video on your device, you must connect to the server.

1. Find the camera that recorded the video, then tap the preview image to maximize it.
2. Tap  (Android) or  (iOS), then:
 - Android - Tap .
 - iOS - Tap .
3. Specify the time to define the period to investigate.
4. Tap **Create**.

Listen to audio in an investigation

If you create an investigation from a camera with audio devices (microphone and speaker) attached, you can listen to incoming and outgoing recorded audio when you play the recording forward at normal speed (see [Find and view video recordings on page 51](#)).

Stream video from your device to your surveillance system

If your system administrator has set up video push in Management Client and has enabled you to use video push, you can stream video with audio from your device to your surveillance system. For more information, see [Streaming video from your mobile device \(explained\) on page 31](#) and [Requirements for using video push on page 12](#).

How you access and use video push depends on the operating system on your device:

1. Access video push:

- Android - In the bottom-right corner, tap .
- iOS - In the navigation bar, tap .

2. Stream the video from the front-facing or back-facing camera of your device:

- Android and iOS - tap .

3. Start streaming video:

- Android - Tap .
- iOS - Tap .

4. Optional. Start audio in the video push:

- Android and iOS - Tap .

5. Optional. Stop audio in the video push:

- Android and iOS - Tap .

6. Stop recording:

- Android - Tap .
- iOS - Tap .

Bookmark an interesting moment

If you see something that you will want to investigate later, you can bookmark the moment in the video while you are streaming the video from your device to your surveillance system.

To add a bookmark:

- Android - In the upper-right corner, tap .
- iOS - In the upper-left corner, tap **Bookmark**.

On the **Bookmarks** screen, you can view, edit, or delete the bookmark that you have added. For more information, see [Bookmarks \(usage\) on page 41](#).

Investigate the video you streamed

XProtect Mobile records the video that you stream so that you can investigate it.

1. Go to the view with the video push camera.
2. Tap the camera to go to full screen.
3. To play back the recording, tap  (Android) or  (iOS).
4. Use the playback controls to investigate the video.

View alarms

Alarms can be triggered by various events:

- A camera stops working.
- A pane of glass gets shattered or broken.
- A locker gets broken into.
- A blacklisted license plate is seen on camera.



To view alarms, ask your system administrator to set up alarms and give you the required user permissions.

To view an alarm:

1. Open **Alarms**:
 - Android - Tap **Alarms**.
 - iOS - Tap .
2. From the **All alarms** list, find the alarm you want to play video for and tap it.

3. View the details of the alarm:
 - Type of the event
 - Time of the occurrence
 - State of the alarm
 - To whom it is assigned
 - Priority of the alarm
4. To play the video:
 - Android - Tap .
 - iOS - Tap .
5. Play the video backward or forward and check when the image that you are seeing was taken.
6. Optional. If the camera has audio devices (microphone and speaker) attached, you can listen to incoming and outgoing recorded audio when you play the video recording forward at normal speed (see [Find and view video recordings on page 51](#)).
7. To save the video for later or share it with others:
 - Android - Tap .
 - iOS - .
8. Specify the time to define the period to investigate.
9. Tap **Create**.

Using actions in XProtect Mobile

If your system administrator has given you permission, you can trigger actions if you need to. In the clients, actions are outputs and events that you can activate. For example, you can:

- Start or stop recording.
- Switch to a different frame rate.
- Trigger SMS and email notifications.
- Move PTZ cameras to PTZ preset positions.
- Activate hardware output.

View and trigger actions

You can view and trigger actions in several places:

- The list of views
- When you view live video
- The **Actions** screen

View actions on the Actions screen

1. To view the list of actions that are grouped by **Outputs** and **Events**:
 - Android - Tap **Actions**.
 - iOS - Tap .

Trigger an action

1. There are two ways to trigger an action:
 - Android and iOS - In the list of actions, tap the action, and then confirm that you want to trigger the action.
 - Android and iOS - In live mode, on the camera toolbar, tap  (Android) or  (iOS) and select the action that is associated with the camera and that you want to trigger.

React to a notification

XProtect Mobile can notify you when something requires your attention even when you're not using the app. For example, the system can notify you when an alarm is triggered.

React now or later

To react immediately, tap the notification to open XProtect Mobile and investigate what happened. When you do this, XProtect Mobile does not store the notification.

If you don't want to react immediately, you can view the notification later:

- Android - Go to the **Notification Area**. Open the notification drawer to see the details.
- iOS - Go to the lock screen or the **Notification Center**.

View doors and take action

You can check the door's state, for example, **Closed**, **Unlocked**, and view live video or play back recorded video from the cameras monitoring the door. If the cameras have audio devices attached, you can also:

- Listen to the incoming audio and use the push-to-talk (PTT) feature in live mode.
- Listen to the incoming and outgoing audio in playback mode.

Based on the state of the door, you can either lock or unlock it.



Lock and **Unlock** are the standard options, but other commands may be defined in your access control system.

1. Open **Access control**:

- Android - Tap **Access Control**, then tap  and select **Doors**.
- iOS - Tap , then tap **Doors**.

A list of doors appears.

2. Tap the door that you want to view.

3. View video in live mode from the camera monitoring the door.

4. Optional. Tap  (Android) or  (iOS) to start playing incoming audio. Tap  (Android) or  (iOS) to stop playing audio (Only for cameras that have microphones attached).

5. Optional. Tap and hold  to start push-to-talk. Release the icon  to end transmitting audio (Only for cameras that have speakers).

6. If required, **Lock** or **Unlock** the door. The state of the door changes.


7. To play back the video, tap the live image and then tap  (Android) or  (iOS). You can see the video stream in live mode even when you are in playback mode.

8. Optional. If the camera has audio devices (microphone and speaker) attached, you can listen to incoming and outgoing recorded audio when you play the video recording forward at normal speed (see [Find and view video recordings on page 51](#)).

Respond to access requests

When someone tries to enter a building using a door controller and access is denied, an access request is sent to your app. Depending on your access control system, you can respond by, for example, unlocking the door to let the person enter.

1. If you are using a VMS that supports push notifications, open the access request from the notification bar. This example is from an Android tablet. It may look different on iOS.

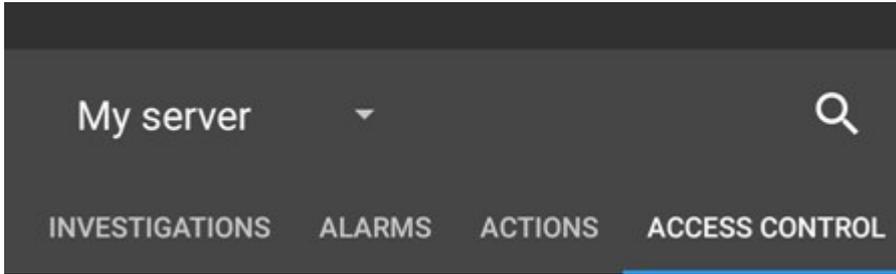

Or:

1. Open the app, and in the list of servers, tap the server that you want to connect to.
2. Open **Access control**:
 - Android - Tap the **Access Control** tab, then tap  and select **Access requests**.
 - iOS - Tap , then tap **Access requests**.
3. Tap an access request to open it. After opening the access request, you will see:
 - Live video from the cameras at the door.
 - Details about the person who tries to enter.



After two minutes, access requests disappear from the list. You can find them in the **Events** list.

4. To switch cameras, swipe the live image left. If there are more than two, swipe several times.
5. Optional. Tap  (Android) or  (iOS) to start playing incoming audio. Tap  (Android) or  (iOS) to stop playing audio (Only for cameras that have microphones attached).
6. Optional. Tap and hold  to start push-to-talk. Release the icon  to end transmitting audio (Only for cameras that have speakers).
7. Now you can either **Lock** or **Unlock** the door.

8. To play back the video before or at the time when the cardholder tried to enter:
 1. Tap the live image. The live video feed displays in a bigger view.
 2. Tap  (Android) or  (iOS) to switch to playback mode. In the changed view, you can still view the live video at the top.
 3. Optional. If the camera has audio devices (microphone and speaker) attached, you can listen to the incoming and outgoing recorded audio when you play the video recording forward at normal speed (see [Find and view video recordings on page 51](#)).

Investigate access control events

You may want to check who entered a building during the last hour or who was denied access. Other examples of access control events are **Door controller tampering** and **Door controller power failure**. Such events are defined in the access control system.



By default, all access control events from the last 30 days are displayed.

1. Open **Access control**:
 - Android - Tap the **Access Control** tab, then tap  and select **Events**.
 - iOS - Tap , then tap **Events**.
2. Optional. If the event is not in the list, tap **Load more** at the bottom of the list to view more events.
3. Tap an event to view details about it. For example, if the event is **Door Locked**, tap **View door** to check the state of the door or to lock or unlock the door.
4. To play back the video recorded at the time of the event:
 - Android - Tap .
 - iOS - Tap .
5. Optional. If the camera has audio devices (microphone and speaker) attached, you can listen to two-way recorded audio when you play the video recording forward at normal speed (see [Find and view video recordings on page 51](#)).



helpfeedback@milestone.dk

About Milestone

Milestone Systems is a leading provider of open platform video management software; technology that helps the world see how to ensure safety, protect assets and increase business efficiency. Milestone Systems enables an open platform community that drives collaboration and innovation in the development and use of network video technology, with reliable and scalable solutions that are proven in more than 150,000 sites worldwide. Founded in 1998, Milestone Systems is a stand-alone company in the Canon Group. For more information, visit <https://www.milestonesys.com/>.

